

# drylin® T rail guide systems | Product range


## Guide carriage – manual adjustable clearance



TW-01



Complete system

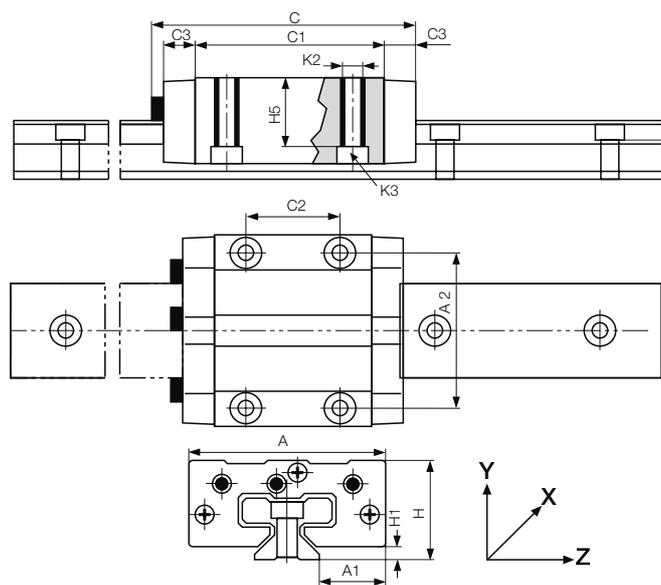

### Order key

complete system ▶ Page 928

Type

Options

## TW - 01 - 15 - LLY

Guide carriages

Manual clearance adjustment

Installation size

Floating bearing

### Options:

LLY: Floating bearing in y-direction

LLZ: Floating bearing in z-direction

### Dimensions [mm]

Part No.	Weight [kg]	H ±0.35	A	C	A1 ±0.35	A2	C1	C2	C3	H1 ±0.35	H5	K2- th- read	Torque Max. [Nm]	K3 for screw DIN 912
TW-01-15	0.11	24	47	74	16.0	38	50	30	9	4.0	16.0	M5	1.5	M4
TW-01-20	0.19	30	63	87	21.5	53	61	40	10	5.0	19.8	M6	2.5	M5
TW-01-25	0.29	36	70	96	23.5	57	68	45	11	5.0	24.8	M8	6.0	M6
TW-01-30	0.50	42	90	109	31.0	72	79	52	12	6.5	27.0	M10	15.0	M8



All elements can be ordered individually or as assembled systems

**TW-01-20-LLY:** Standard guide carriage with manually adjustable clearance, installation size 20 and floating bearing in y-direction

**TK-01-20-2-500:** Complete system with two standard guide carriages type 01, installation size 20 and standard guide rail, 500 mm length

Can be combined with:



TS-01-...



Technical data

▶ Page 917