



Pregled materijala:

Vrste	Punioci	Tvrdća [Sh]	Toplota [°C]		Toplota [°C] voda / para	Toplota [°C] topli vazduh	FDA sertifikat
AFLAS®	-	85A	-5	200	-	230 kratkotrajno	-
EPDM	peroxid	85A	-45	130	130	180 kratkotrajno	-
EPDM-KTW	-	81A	-40	130	130	150 kratkotrajno	da + KTW
FPM	-	82A	-20	220	-	300 kratkotrajno	da
FPM-FDA	-	85A	-20	220	-	300 kratkotrajno	da
H-NBR	-	85A	-20	150	120	180 kratkotrajno	-
H-PU	-	95A	-20	115	-	-	da
H-PU55D	-	55D	-20	115	-	-	da
KT 200	sintetička vlakna	-	-40	120	-	-	-
LT-PU	-	96A	-55	110	-	-	-
Silikon (MVQ)	-	85A	-60	200	-	300 kratkotrajno	-
MVQ-FDA	-	85A	-60	200	110	300 kratkotrajno	da
NBR	-	85A	-30	110	-	-	-
PA	-	85D	-40	110	-	-	-
PE-UHMW	-	61D	-200	80	-	-	-
POM	-	85D	-45	100	-	-	da
PTFE	čist	55D	-200	260	-	-	da
PTFE I	15% staklo+5% MoS ₂	58D	-200	260	-	-	-
PTFE II	40 % bronza	60D	-200	260	-	-	-
PTFE III	25 % ugljenik	67D	-200	260	-	-	-
SL-PU	MoS ₂	96A	-20	110	-	-	-
T-NBR	-	80A	-50	110	-	-	-
TPE	-	55D	-40	120	-	-	-

Specijalni materijali: na zahtev PTFE sa puniocima PEEK.

Katalog profila hidrauličnih zaptivača

- proizvodnja za jedan dan
- širok izbor profila i materijala
- izrada zaptivača do 400 mm u prečniku

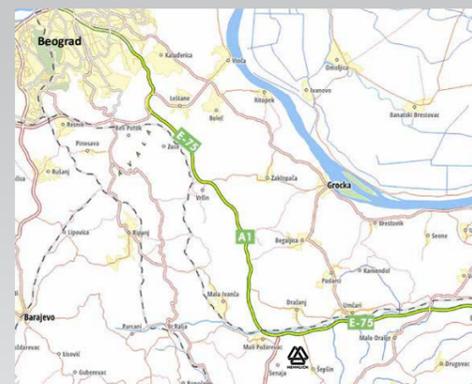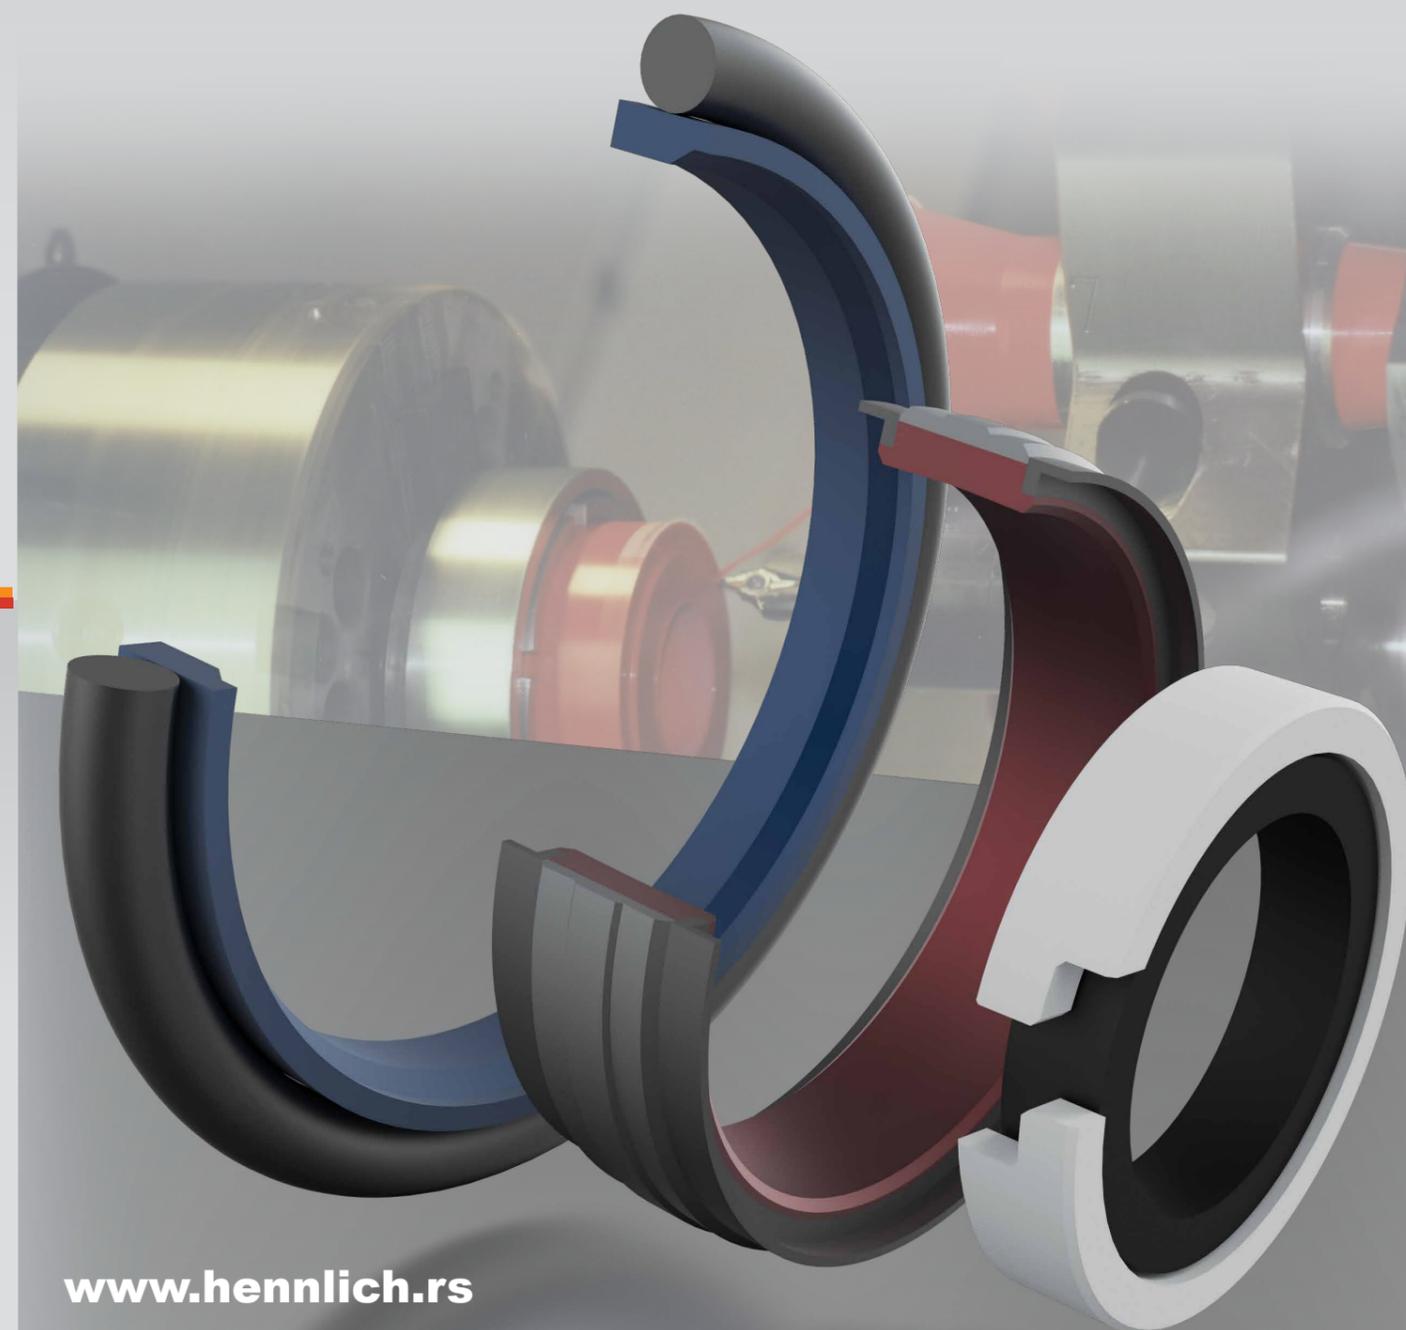

Auto-put E-75, naplatna rampa Mali Požarevac
Senajska 1, 11 433 Senaja - Beograd

Zoran Marinković
Mob: +381 65 588 1553
e-mail: zoran.marinkovic@hennlich.rs


Nenad Gavrić
Mob: +381 65 588 1552
e-mail: nenad.gavric@hennlich.rs

www.hennlich.rs


www.hennlich.rs



ZAPTIVAČI KLIPNJAČE

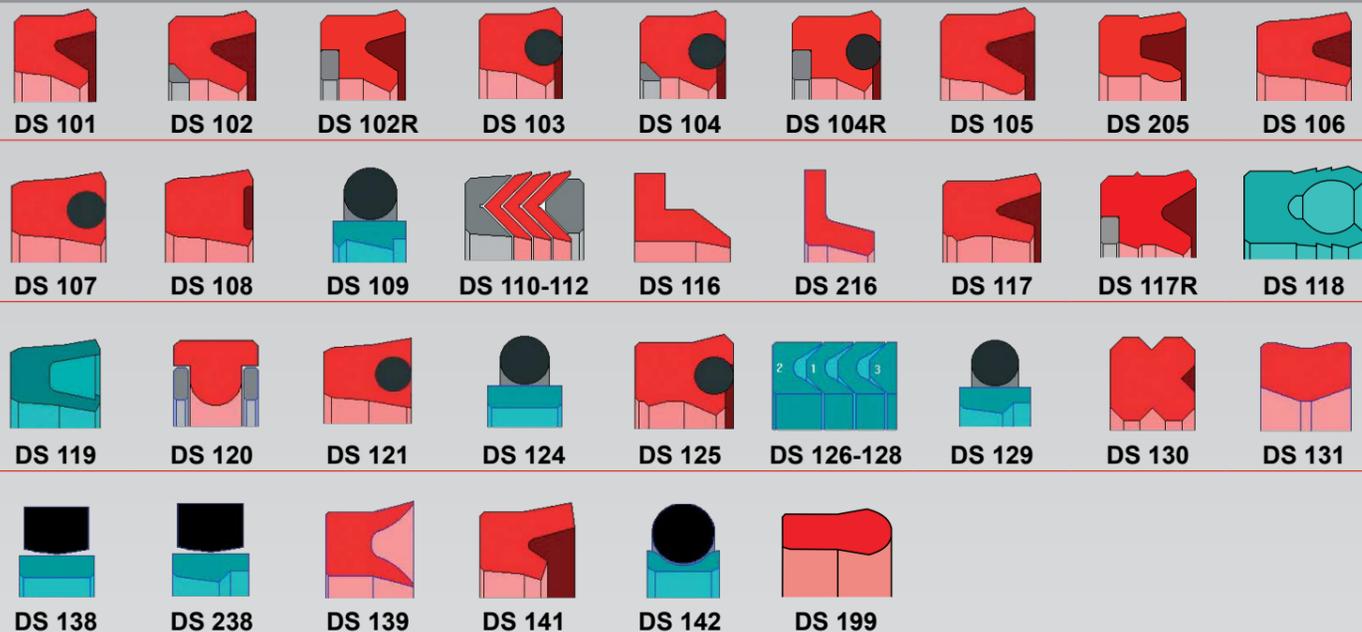

BRISAČI

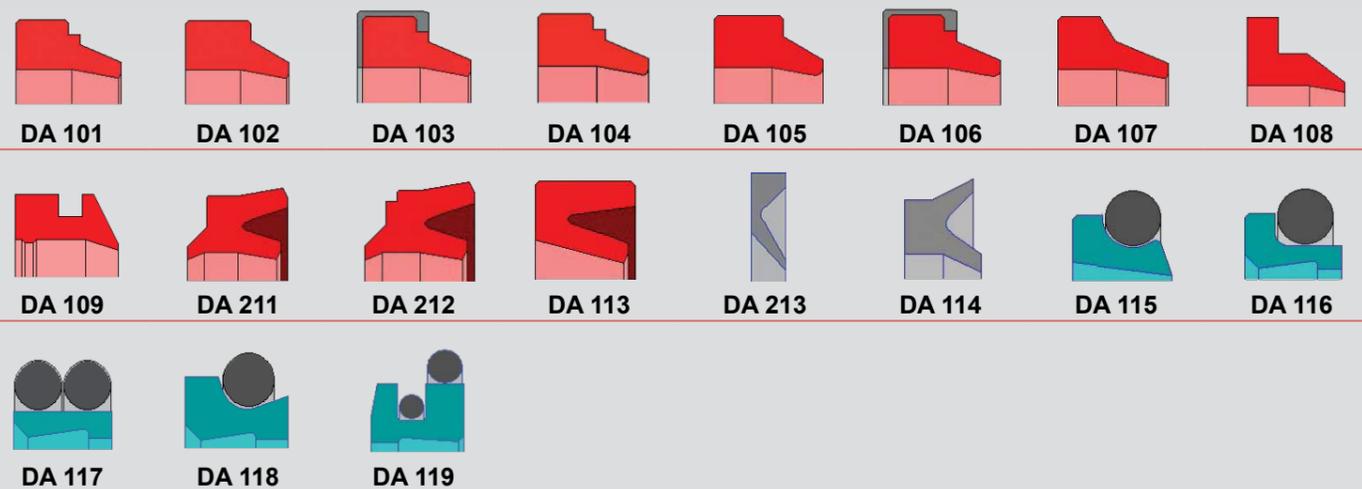

POTPORNI PRSTENOVİ



STATIČKI ZAPTIVAČI



ZAPTIVAČI KLIPA



VODEĆI PRSTENOVİ



ROTACIONI ZAPTIVAČI

